

External Cast Stone Window Sill

Technical Data Sheet

CMS Danskin Acoustics External Cast Stone Window Sills are manufactured using high quality crushed rock fines and a blend of sands giving the appearance of natural stone.

FEATURES and BENEFITS


- Lighter weight profile
- Available in either full lengths (900mm & 1500mm) or cut to bespoke sizes
- High quality, through colour to suit the project: Light Grey or Dark Grey (Buff can also be made to order)
- Standard widths: 165mm and 190mm (220mm made to order)
- Easy to cut
- Repair mixes available
- Request a sample pack today

COLOURS



Light Grey

Dark Grey



Buff
(made to order)

CUTTING




External Cast Stone Window Sills should be cut with a diamond tipped masonry blade which should ideally be water fed. Once cut, all units should be washed down to remove any excess dust. Due regard should be given to protecting the operative in accordance with current Health & Safety considerations for dust suppression and elimination in the workplace.

Alternatively CMS Danskin Acoustics offer a cut to size service from the manufacturing factory in Wishaw, Scotland.

PHYSICAL INFORMATION

Length (mm)	Width (mm)	Height rear (mm)	Height front (mm)
900	165	65	30
1500			
900	190	65	30
1500			

Typical material density - 2100kg/m³

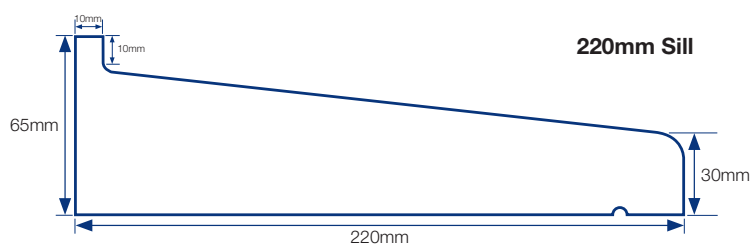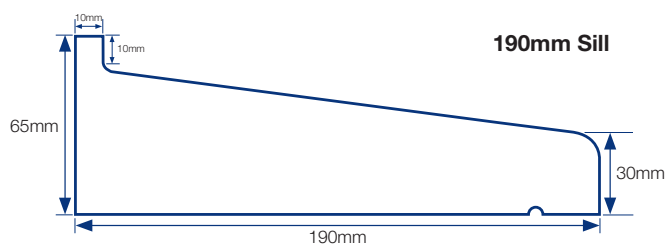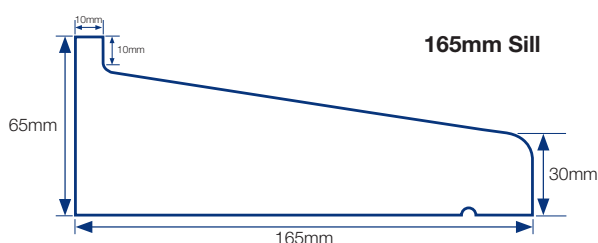

IMPORTANT: The information provided within this document is believed correct and to the best of our available knowledge at its revision date and is provided as suggestion for safe handling, storage, transportation, use and disposal. The information should not be considered obligation in respect of warranty of (technical) performance, quality (specification) or suitability for any application or design. The customer must satisfy themselves the product (or draft specification) are relevant and suitable for their need and design intent. Prospective users should test a sample of product under their own conditions to satisfy themselves of its suitability for intended purpose and that expert advice be sought where different applications are contemplated. Due to our policy of continuous improvement we reserve the right to alter or amend published specification or design without prior notice. Reproduction of any part of this publication in any manner is not permitted without our prior written consent.