

ACOUSTIC UNDERLAYMENTS





Cheval Three Quays, London

Innovative solutions for acoustics, vibration, gyms and building protection.

REGUPOL is compatible with all types of floor screed; these high performing isolation solutions deliver superior impact performance.

CMS Danskin Acoustics are proud to be the sole UK distributors of the REGUPOL portfolio of acoustic, vibration and gym flooring products.



REGUPOL sonus multi 3 & 4.5

formerly Regupol 4515 Multi Acoustic Underlay

REGUPOL sonus multi is a tough and resilient acoustic underlay that has been developed to attenuate impact sound beneath a range of floor finishes, delivering exceptional acoustic performance without ageing or collapsing.

Designed for use with a wide range of floor finishes including vinyl, carpet, carpet tiles, stone / porcelaine / parquet ceramic tiles, wooden and laminate based floor finishes.





Embassy Gardens



REGUPOL sonus eco 3 & 4.5

formerly Regupol 4515 Eco Acoustic Underlay


REGUPOL sonus eco is a tough, resilient and low cost acoustic underlay that has been developed to attenuate impact sound beneath a wide range of floor finishes, including carpet, wood, laminates and tiles in concrete construction. Extremely durable, flexible and sustainable, **REGUPOL sonus eco** delivers cost effective impact sound insulation and is ideal for all types of developments.



REGUPOL sonus 3912

formerly Regupol 3912

REGUPOL sonus 3912 is a tough, resilient acoustic underlay manufactured from PUR Foam and is ideally suited to refurbishment and timber based constructions to comply with Part E, 2003. It is also suitable for concrete constructions.

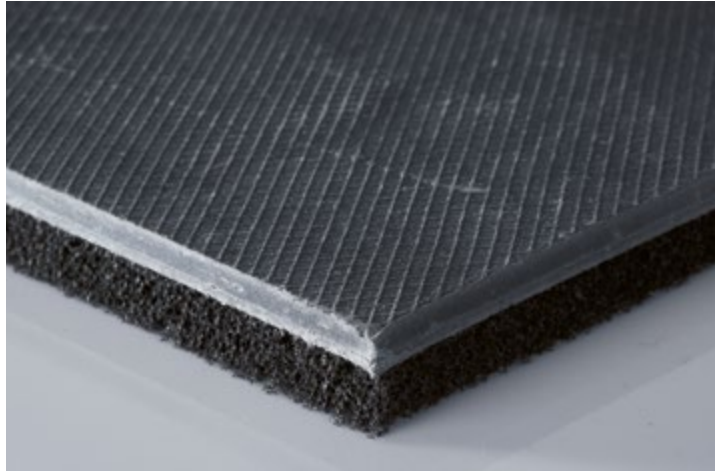


Soundlay

Noise barrier for concrete floors

SoundLay is designed for concrete floor applications and can also be used for timber floors. It is primarily used where impact noise insulation is required although can also provide a level of airborne noise insulation.

It is a two layer laminate, the upper being WB7.5 acoustic barrier supported by a 6mm layer of acoustic foam.

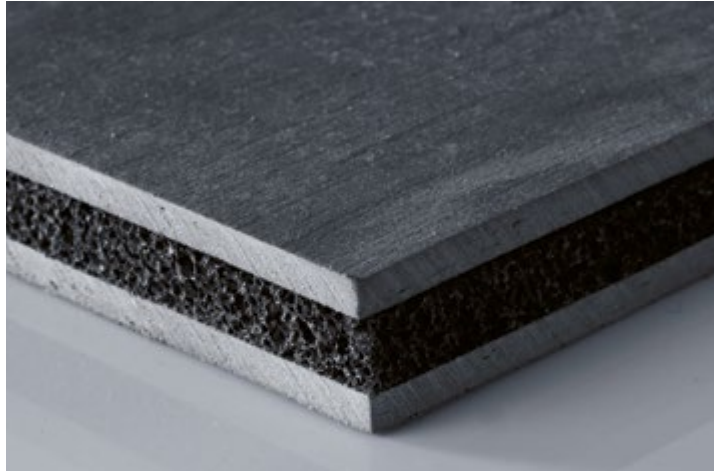

Soundlay Plus

Noise barrier for timber floors

SoundLay Plus is primarily designed for timber floors although can also be used with concrete floor constructions. It offers additional airborne and impact sound insulation to SoundLay so is aimed at developments where superior noise control is necessary.

This high performance composite is a sandwich laminate of two layers of WB7.5 acoustic barrier separated by a 6mm layer of acoustic foam.



REGUPOL 3D washers
REGUPOL sonus isolation strips can be used with
Regupol 3D washers to isolate mechanical fixings

REGUPOL sonus 3912 isolation strips

formerly Regupol Acoustic Isolating Strips

REGUPOL sonus isolation strips are designed to sit beneath all types of partition walls, and on top of joists for floating floor applications, and are a very simple and effective way to reduce structure borne noise. .

There are a number of different **REGUPOL** materials that can be installed as isolating strips each one tailored to withstand a specific weight per linear metre therefore we have a **REGUPOL** solution for all particular requirements.



REGUPOL Adhesive 43-105*

Acrylic Adhesive

REGUPOL adhesive 43-105 is a solvent free acrylic emulsion-based adhesive, for bonding many sound insulation materials to common sub-floors and many floor finishes to the insulation.

This easy to spread adhesive, with a long open time, provides early tack and minimum slip, quickly building to a strong permanent bond. It is non-staining and has excellent resistance to plasticiser migration.




REGUPOL Adhesive 46-101*

Multi-purpose adhesive

REGUPOL adhesive 46-101 is a single-component adhesive that self-cures to form an elastic and non-shrinkable adhesive layer.

REGUPOL adhesive 46-101 represents the premium solution for bonding of acoustic flooring products and materials, by means of enhancing the acoustic performance of the entire system.

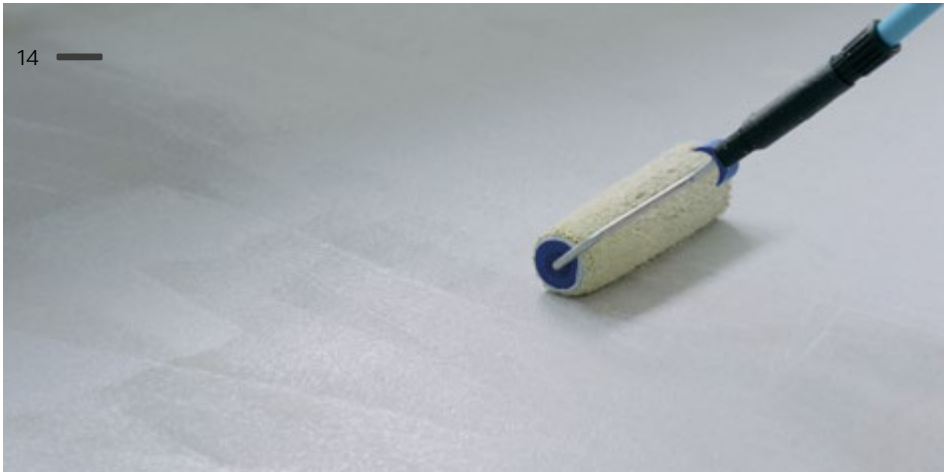

REGUPOL barrier 99-201*

Moisture Vapour Suppressant

REGUPOL barrier 99-201 is a ready-for-use, one part, water-based moisture vapour suppressant and DPM.

- Designed to work as a DPM/moisture vapour suppressant prior to the application of a full coverage of REGUPOL adhesive 46-101 & REGUPOL adhesive 43-105
- Easy to apply. No mixing required
- Suitable for heated concrete and sand cement screeds
- Extremely fast drying - as quick as 30 minutes, depending on environmental conditions
- Colour change technology to demonstrate when the product is ready for adhesive application
- High bond strength to subfloors and to adhesive



Royal Shakespeare Theatre

* Please see separate Safety Data Sheet
for product classification



CMS Dansk Acoustics

Unit 2, Lyncastle Road
Warrington WA4 4SN
01925 577711
info@cmsdansk.co.uk

1 Netherton Road, Wishaw, North
Lanarkshire ML2 0EQ
01698 356000
enquiries@dansk.co.uk

www.cmsdansk.co.uk