

External Cast Stone Window Sill


Technical Data Sheet

CMS Danskin Acoustics External Cast Stone Window Sills are manufactured using high quality crushed rock fines and a blend of sands giving the appearance of natural stone.

FEATURES and BENEFITS

- Lighter weight profile
- Available in either full lengths (900mm & 1500mm) or cut to bespoke sizes
- High quality, through colour to suit the project: Light Grey, Dark Grey or Brown (Buff can also be made to order)
- Standard widths: 165mm and 190mm (220mm made to order)
- Easy to cut
- Repair mixes available
- Request a sample pack today

COLOURS



Light Grey



Dark Grey



Brown






Buff
(made to order)

PHYSICAL INFORMATION

Length (mm)	Width (mm)	Height rear (mm)	Height front (mm)
900	165	65	30
1500			
900	190	65	30
1500			

Typical material density - 2100kg/m³

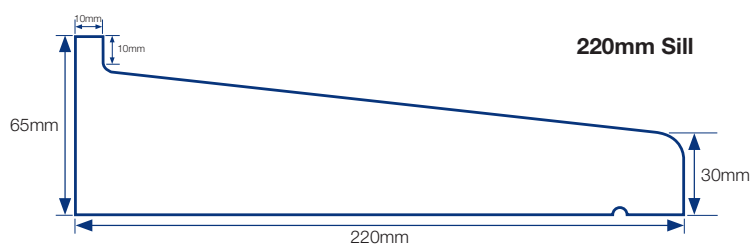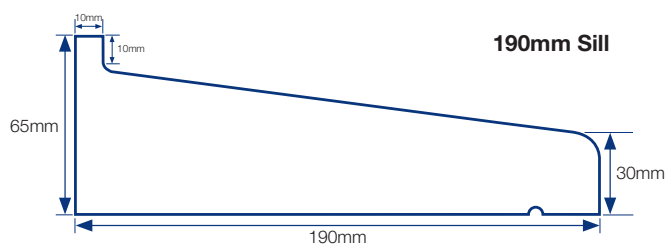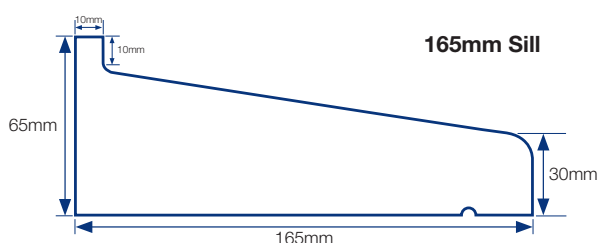

CUTTING

External Cast Stone Window Sills should be cut with a diamond tipped masonry blade which should ideally be water fed. Once cut, all units should be washed down to remove any excess dust. Due regard should be given to protecting the operative in accordance with current Health & Safety considerations for dust suppression and elimination in the workplace.

Alternatively CMS Danskin Acoustics offer a cut to size service from the manufacturing factory in Wishaw, Scotland.